



PCT/GB 2004 / 0 0 2 5 8 7

01 JULY 2004



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 27 JUL 2004

WIPD Section 74(PCT) and (4)

I, the undersigned, being an officer duly authorised in accordance with Section 74(PCT) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 22 June 2004

**BEST AVAILABLE COPY**

Patents Form 1/77

Patents Act 1977  
(Rule 16)

The  
Patent  
Office

20JUN03 E816462-1 D02094  
P01/7700 0.00-0314323.7

Request for grant of a patent



**1/77**

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1.	Your reference	MCR/43524GB1	19 JUN 2003
2.	Patent application number	0314323.7	
3.	Full name, address and post code of the or each applicant	Money Controls Limited Coin House New Coin Street Royton Oldham OL2 6JZ	
	Patents ADP number		
	If the applicant is a corporate body, give the country/state of its incorporation	United Kingdom	8373417002
4.	Title of the invention	Coin Dispensing Apparatus	
5.	Name of your agent	VENNER, SHIPLEY & CO	
	"Address for service" in the United Kingdom to which all correspondence should be sent	20 LITTLE BRITAIN LONDON EC1A 7DH	
	Patents ADP	1669004	
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and the or each application number	Country	Priority application number Date of filing
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and filing date of the earlier application	Number of earlier application	Date of Filing

Patents Form 1/77

Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'YES' if:

- a) any applicant in 3. above is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body)

YES

Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description 8

Claim(s) 3

Abstract 1

Drawing(s) 9

19 10

10. If you are also filing any of the following state how many against each item.

Priority documents N/A

Translations of priority documents N/A

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

19 June 2003

Matthew Read

12. Name and daytime telephone number of person to contact in the United Kingdom

Matthew Read  
020 7600 4212

## Coin Dispensing Apparatus

### Description

This invention relates to a coin dispensing apparatus and has particular but not  
5 exclusive application to a hopper for dispensing coins in gaming and vending machines.

Hitherto, coin dispensing apparatus in the form of a hopper has been used to  
dispense coins in gaming machines to provide a prize and also to dispense coins  
10 in vending machines to provide change. An example is the Compact Hopper  
manufactured by Money Controls Limited. Reference is also directed to EP-A-  
0266021.

The hopper is typically fed with coins from a coin acceptor. A disc-like rotary  
15 member has a number of coin receptacles that receive the coins and a motor  
rotates the rotary member so as to move coins in the receptacles along an  
annular coin path so that they can be ejected successively from the receptacles  
through a coin outlet disposed to one side of the path. A spring loaded ejector  
device ejects coins from the receptacles to the coin outlet. The ejector device is  
20 positioned so that it is moved from a coin engaging position against the force of  
the spring to a discharge position by a coin as it moves along the annular path to  
be ejected from the coin outlet, so that as the coin comes aligned with the outlet,  
the force of the spring is released and the ejector device moves from a discharge  
position so as to eject the coin through the outlet and thence to the coin  
25 engaging position for the next approaching coin to be ejected.

An optical counting device has been used to count the coins as they are ejected  
from the outlet so that the correct payout or change can be dispensed. Hitherto,  
the counting device has comprised an optical emitter and detector at the coin  
30 outlet so that each dispensed coin breaks the optical path between the emitter  
and the detector to provide a coin count signal.

However, a problem with this conventional counting arrangement is that the optical emitter and detector are mounted on the exterior of the apparatus rendering them vulnerable to attack by fraudsters and vandals. For example, a fraudster may insert a knife blade or other similar instrument through the conventional payout opening of the vending or gaming machine and physically break off the optical counting device. As a result, there is a risk that the dispensing apparatus will erroneously dispense all of the coins in the hopper.

The present invention seeks to provide a coin dispensing apparatus with an improved counting arrangement which is less prone to fraudulent operation and vandalism.

In a first aspect the invention provides coin dispensing apparatus comprising a coin source, a rotary member with a plurality of coin receptacles to receive coins from the coin source, a motor to rotate the rotary member so as to move coins in the receptacles along an annular coin path, a coin outlet disposed to one side of the coin path, and a movable ejector device to eject coins from the receptacles through the coin outlet, the ejector device being positioned so that it is moved to from a coin engaging position to a discharge position by a coin as it moves along the annular path to be ejected through the coin outlet, drive means operable to drive the ejector device from the discharge position to eject the coin through the outlet and thence to the coin engaging position for a next approaching coin to be ejected, and counting means responsive to movement of the ejector device to count coins ejected through the outlet.

Since the counting means is responsive to the movement of the ejector device, it can be housed within the body of the coin dispensing apparatus, thereby rendering the arrangement less accessible to fraudsters and vandals. More particularly, if a vandal jams the operation of the ejector device to confuse the counting means, no coins will be ejected and so the fraudster will be defeated.

The invention also provides a coin dispensing apparatus with an improved ejector device.

In accordance with the invention, there is provided coin dispensing apparatus  
5 comprising a coin source, a rotary member with a plurality of coin receptacles to  
receive coins from the coin source, a motor to rotate the rotary member so as to  
move coins in the receptacles along an annular coin path, a coin outlet disposed  
to one side of the coin path, and a movable ejector device to eject coins from the  
receptacles through the coin outlet, the ejector device being positioned so that it  
10 is moved to from a coin engaging position to a discharge position by a coin as it  
moves along the annular path to be ejected through the coin outlet, drive means  
operable to drive the ejector device from the discharge position to eject the coin  
through the outlet and thence to the coin engaging position for a next  
approaching coin to be ejected, the ejector device comprising first and second  
15 coin engaging members movable independently between said coin engaging  
position and said discharge position.

The invention also provides coin dispensing apparatus comprising a coin source,  
a rotary member with a plurality of coin receptacles to receive coins from the  
20 coin source, a motor to rotate the rotary member so as to move coins in the  
receptacles along an annular coin path, a coin outlet disposed to one side of the  
coin path, and a movable ejector device to eject coins from the receptacles  
through the coin outlet, the ejector device being positioned so that it is moved to  
from a coin engaging position to a discharge position by a coin as it moves along  
25 the annular path to be ejected through the coin outlet, drive means operable to  
drive the ejector device from the discharge position to eject the coin through the  
outlet and thence to the coin engaging position for a next approaching coin to be  
ejected, the ejector device comprising at least one slider member movable  
between the coin engaging position and the discharge position.

In order that the invention may be more fully understood embodiments thereof will now be described by way of example with reference to the accompanying drawings in which:

- Figure 1 is an exploded perspective view from above and one side of a coin  
5 dispensing apparatus according to the invention;  
Figure 2 is a front view of the apparatus shown in Figure 1;  
Figure 3 is a rear view of the apparatus;  
Figure 4 is a side view of the apparatus;  
Figure 5 is a schematic perspective view of the ejector member of the apparatus;  
10 Figure 6 is a schematic block diagram of electrical coin counting circuitry;  
Figures 7A - E illustrate successive stages in the ejection of a coin from the coin  
dispensing apparatus;  
Figure 8 is a schematic plan view of an alternative embodiment of the ejector  
device in which the two coin engaging members are independently movable;  
15 Figure 9A and B are schematic illustrations of the ejector member of Figure 8 in  
different operative configurations;  
Figure 10 is a schematic perspective view of another embodiment of ejector  
device for use in the apparatus; and  
Figure 11 is a sectional of the configuration shown in Figure 10 taken along the  
20 line X - X'.

Referring to Figures 1 to 4, the coin dispensing apparatus comprises a body  
member 1, a hopper 2, and a disc-like rotary member 3 mounted on the body  
member 1. The rotary member 3 is rotated in the direction of arrow A by an  
25 electric motor 4 mounted within the body member 1, through a reduction gear  
train 5. An example of the gear train 5 is described in more detail in EP-A-  
0266021.

In use, coins fall into the hopper 2, for example from a coin acceptor, so that the  
30 hopper acts as a coin source and feeds coins into circular apertures 6 in the  
rotary member 3. The coins slide on inclined side wall 7 of the body member 1  
which has an annular upper surface 8 bounded by a circular side wall 9 around

the circular edge of the rotary member 3. A coin outlet 10 is provided in the side wall 9.

A coin ejector device 11 in the form of a pivoted fork member has first and second coin engaging members 11a, 11b protruding through respective openings 12a, 12b in the inclined wall 7 of the body member.

The ejector device 11 is shown in more detail in Figure 5 and comprises an arm 13 which includes integral lugs 14 that are pivotally mounted in corresponding receptacles within the body member 1 (not shown) so that the device 11 can turn about axis B-B'.

A tension spring 15 is mounted at one end 15a on lug 16 on the arm 13, and at the other end 15b on the body member 1 by a mounting (not shown).

The ejector device 11 can move from a coin engaging position shown in Figure 5, with the first and second coin engaging members 11a, 11b at one of end of each of the openings 12a, 12b, to a coin dispensing position when an approaching coin on the surface 8 moves the coin engaging members 11a, 11b, towards the other end of the openings 12a, 12b, against the force of spring 15.

In order to count coins, movement of the ejector device 11 between the coin engaging and coin dispensing positions is detected using an optical emitter and detector 17, 18 which may operate with any suitable optical wavelength including non-visible radiation such as infra-red or ultra-violet. In this example, an infra-red detector is used. The optical path 19 between the emitter and detector 17, 18 is interrupted by an arm 13' on the ejector device 11. In the coin engaging position shown in Figure 5, the arm 13' interrupts the optical path 19 so that detector 18 detects no radiation from the emitter 17. However, when the device 11 rotates about axis B-B' to the coin dispensing position, in which the coin engaging members 11a, 11b are moved to the opposite ends of the openings 12a, 12b, the optical path 19 is opened as a result, detector 18 produces an electrical



output. As will be explained later, the ejector device 11 rotates back and forth for each coin ejection and so a coin count signal is developed by the detector 18.

Figure 6 illustrates the electrical circuitry of the apparatus. A controller 20 receives the count signal from the detector 18 and also controls energisation of the emitter 17. When an instruction is received to pay out coins, a pay instruction 21, which may comprise an instruction to pay out a predetermined number of coins, is received by the controller 20, for example from a control unit (not shown) associated with a vending or gaming machine. In use, the controller 20 energises the drive motor 4 so as to rotate member 3 until the number of count signals developed by detector 18 corresponds to the coin number given in the pay instruction 21.

Operation of the device will now be described in more detail with reference to Figures 7A - 7E. Figure 7A shows a coin C which has passed through aperture 6' in the rotary member 3 so as to sit in the receptacle on the underside of the member 3, in engagement with annular surface 8 on the body member 1. The underside of the rotary member 3 has a hollowed out annular portion 3a of thickness corresponding to that of one coin. The coin C abuts a lug 3b that extends across the thickness of the receptacle onto the surface 8. This arrangement is described in more detail in our EP-A-0266021. As the motor 4 rotates the disc-like member 3 in the direction of arrow A, the coin C is swept towards the coin ejector device 11 as shown in Figure 7B. In Figures 7A and 7B, the ejector device is in its coin engaging position corresponding to the arrangement of Figure 5, in which the spring 15 biases the coin engaging members 11a, 11b to one end of the openings 12a, 12b. Thus, as shown in Figure 7B, the coin C engages the first and second members 11a, 11b as the motor 4 rotates member 3 in the direction of arrow A.

Then, as shown in Figure 7C, continued rotation of the member 3 causes the coin C to push back the member 11 against the bias of the spring 15, into the coin dispensing position so that, as shown in Figure 7D, when the coin C

becomes aligned with the coin outlet 10, the spring bias drives the coin engaging members 11a, 11b back towards the coin engaging position and "flicks" the coin C through the coin outlet. Then, as shown in Figure 7E, the member 11 returns to the initial, coin engaging position and the coin C is paid out through the coin outlet 10.

Thus, the coin ejection process produces a back and forth rocking motion of the ejector member 11 which modulates the optical path 19 between the emitter and detector 17, 18 thereby producing a coin count signal each time the coin is ejected. Referring to Figure 6, the coin count signals are counted by the controller 20 and compared with the payout instruction 21 so as to determine when a predetermined payout has been effected. The motor 4 is then de-energised in order to prevent overpayment.

An advantage of the described counting system is that the optical detectors are mounted entirely within the body member 1 making it difficult for a fraudster to tamper with them. In the event that the fraudster attempts to tamper with the ejector member 11, this also most certainly will produce a disabling effect on the entire coin dispensing apparatus thereby defeating the object of the fraudster.

In the event of a coin jam, the coin may continue to rotate past the coin ejecting member, driving it further along the openings 12a, 12b so that the coin engaging members rotate downwardly below the surface 8 and allow the coin to pass around in a complete rotation and thereby avoid jamming of the apparatus.

Referring now to Figure 8 and 9, an alternative ejector device for the dispensing apparatus is shown which is generally similar to the arrangement of Figure 5 but in which the coin engaging members 11a, 11b are independently rotatable about the axis B-B'. Each coin engaging member 11a, 11b has a respective arm 13a, 13b biased by an individual spring 15a, 15b. As shown in Figure 9B, movement of either of the arms 13a, 13b from the coin engaging position to the coin

dispensing position will result in interruption of the optical path 19 between the optical emitter and detector 17, 18 thereby producing a count signal. This can also be seen from Figure 8. The advantage of the independently movable members 11a, 11b is that a more even pressure is allied to the coin C during the ejection process since both of them can engage the perimeter of the coin and produce an individual flicking action to eject the coin through the outlet 10.

Another embodiment of ejector member is shown in Figures 10 and 11, in which the coin engaging members 11a, 11b are slidably mounted. The coin engaging member 11a is shown in sectional view in Figure 11 and comprises a slider member 22a received in an integrally moulded slot 23a in the wall 7 that provides the annular surface 8 over which the coins C slide in use. The slider member 22a is biased by a compression spring 24a into the coin engaging position shown in Figure 11. The slider member 22a can slide along the slot 23a in the direction of arrow D towards the coin dispensing position. The slider member 22a has an upstanding coin engaging part 25a which engages the edge of coin C when it is moved in the direction arrow E by the rotary member 3 (not shown in this Figure). The slider also includes a downwardly dependent arm 26a which interrupts the optical path 19 between the emitter and detector 17, 18 (not shown) to produce the coin counting signal each time. It will be understood that the second coin engaging member 11b has an identical construction to the arrangement of Figure 11 so that when either of the members 25a, 25b move from the coin engaging position to the coin dispensing position, the optical beam 19 is interrupted and the coin counting signal is produced.

Many modifications and variations of the described example fall within the scope of the invention as claimed hereinafter.

As used herein, the term coin includes tokens and other coin-like items having an attributable monetary value.

## Claims

1. Coin dispensing apparatus comprising a coin source, a rotary member  
5 with a plurality of coin receptacles to receive coins from the coin source, a motor  
to rotate the rotary member so as to move coins in the receptacles along an  
annular coin path, a coin outlet disposed to one side of the coin path, and a  
movable ejector device to eject coins from the receptacles through the coin  
outlet, the ejector device being positioned so that it is moved to from a coin  
10 engaging position to a discharge position by a coin as it moves along the annular  
path to be ejected through the coin outlet, drive means operable to drive the  
ejector device from the discharge position to eject the coin through the outlet  
and thence to the coin engaging position for a next approaching coin to be  
ejected, and counting means responsive to movement of the ejector device to  
15 count coins ejected through the outlet.
2. Apparatus according to claim 1 wherein the counting means comprises  
an optical emitter and detector, movement of the ejector device controlling  
passage of the radiation from the emitter to the detector in response to each coin  
20 ejected through the coin outlet whereby the detector provides a count signal  
corresponding to the ejected coins.
3. Apparatus according to claim 1 or 2 wherein the drive means  
comprises a spring urging the ejector device from the discharge position towards  
25 the coin engaging position.
4. Apparatus according to any preceding claim including a body in which  
the motor and the ejector device are mounted, a flat surface on the body that  
receives coins from the source, the surface having an opening therein through  
30 which the ejector device protrudes to eject coins.

5. Apparatus according to claim 4 wherein the flat surface has an annular periphery bounded by a peripheral wall having the coin outlet therein.

6. Apparatus according to claim 4 or 5 wherein the coin source  
5 comprises a hopper mounted on the body.

7. Apparatus according to any preceding claim wherein the ejector device comprises first and second coin engaging members movable between said coin engaging position and said discharge position.

10 8. Apparatus according to claim 7 wherein the coin engaging members are mounted for movement in unison.

9. Apparatus according to claim 7 wherein the coin engaging members  
15 are mounted for movement independently.

10. Apparatus according to any preceding claim wherein the ejector device comprises at least one an arm configured to turn between said coin engaging position and said discharge position, and the counting means is  
20 operable to detect the turning of the arm in response to each coin ejected through the coin outlet.

11. Apparatus according to any one of claims 1 to 9 wherein the ejector device comprises at least one slider member movable between the coin engaging  
25 position and the discharge position.

12. Coin dispensing apparatus comprising a coin source, a rotary member with a plurality of coin receptacles to receive coins from the coin source, a motor to rotate the rotary member so as to move coins in the receptacles along an  
30 annular coin path, a coin outlet disposed to one side of the coin path, and a movable ejector device to eject coins from the receptacles through the coin outlet, the ejector device being positioned so that it is moved to from a coin

engaging position to a discharge position by a coin as it moves along the annular path to be ejected through the coin outlet, drive means operable to drive the ejector device from the discharge position to eject the coin through the outlet and thence to the coin engaging position for a next approaching coin to be ejected, the ejector device comprising first and second coin engaging members movable independently between said coin engaging position and said discharge position.

13. Apparatus according to claim 12 wherein the first and second coin engaging members each comprise an arm configured to turn between said coin engaging position and said discharge position.

14. Apparatus according to claim 12 wherein the first and second coin engaging members each comprise a slider configured to slide between said coin engaging position and said discharge position.

15. Coin dispensing apparatus comprising a coin source, a rotary member with a plurality of coin receptacles to receive coins from the coin source, a motor to rotate the rotary member so as to move coins in the receptacles along an annular coin path, a coin outlet disposed to one side of the coin path, and a movable ejector device to eject coins from the receptacles through the coin outlet, the ejector device being positioned so that it is moved to from a coin engaging position to a discharge position by a coin as it moves along the annular path to be ejected through the coin outlet, drive means operable to drive the ejector device from the discharge position to eject the coin through the outlet and thence to the coin engaging position for a next approaching coin to be ejected, the ejector device comprising at least one slider member movable between the coin engaging position and the discharge position.

16. Coin dispensing apparatus substantially as hereinbefore described with reference to the accompanying drawings.

## Abstract

### Coin Dispensing Apparatus

5 A coin dispensing apparatus comprises a body member (1) a coin source, a rotary member (3) with a plurality of coin receptacles (6) to receive coins from the coin source, a motor (4) to rotate the rotary member so as to move coins in the receptacles along an annular coin path, a coin outlet (10) disposed to one side of the coin path, and a movable ejector device (11) to eject coins from the  
10 receptacles through the coin outlet, the ejector device being positioned so that it is moved to from a coin engaging position to a discharge position by a coin as it moves along the annular path to be ejected through the coin outlet, a spring (15) to drive the ejector device from the discharge position to eject the coin through the outlet and thence to the coin engaging position for a next approaching coin  
15 to be ejected, and a counting arrangement (17, 18, 19) within the body member (1) responsive to movement of the ejector device to count coins ejected through the outlet.

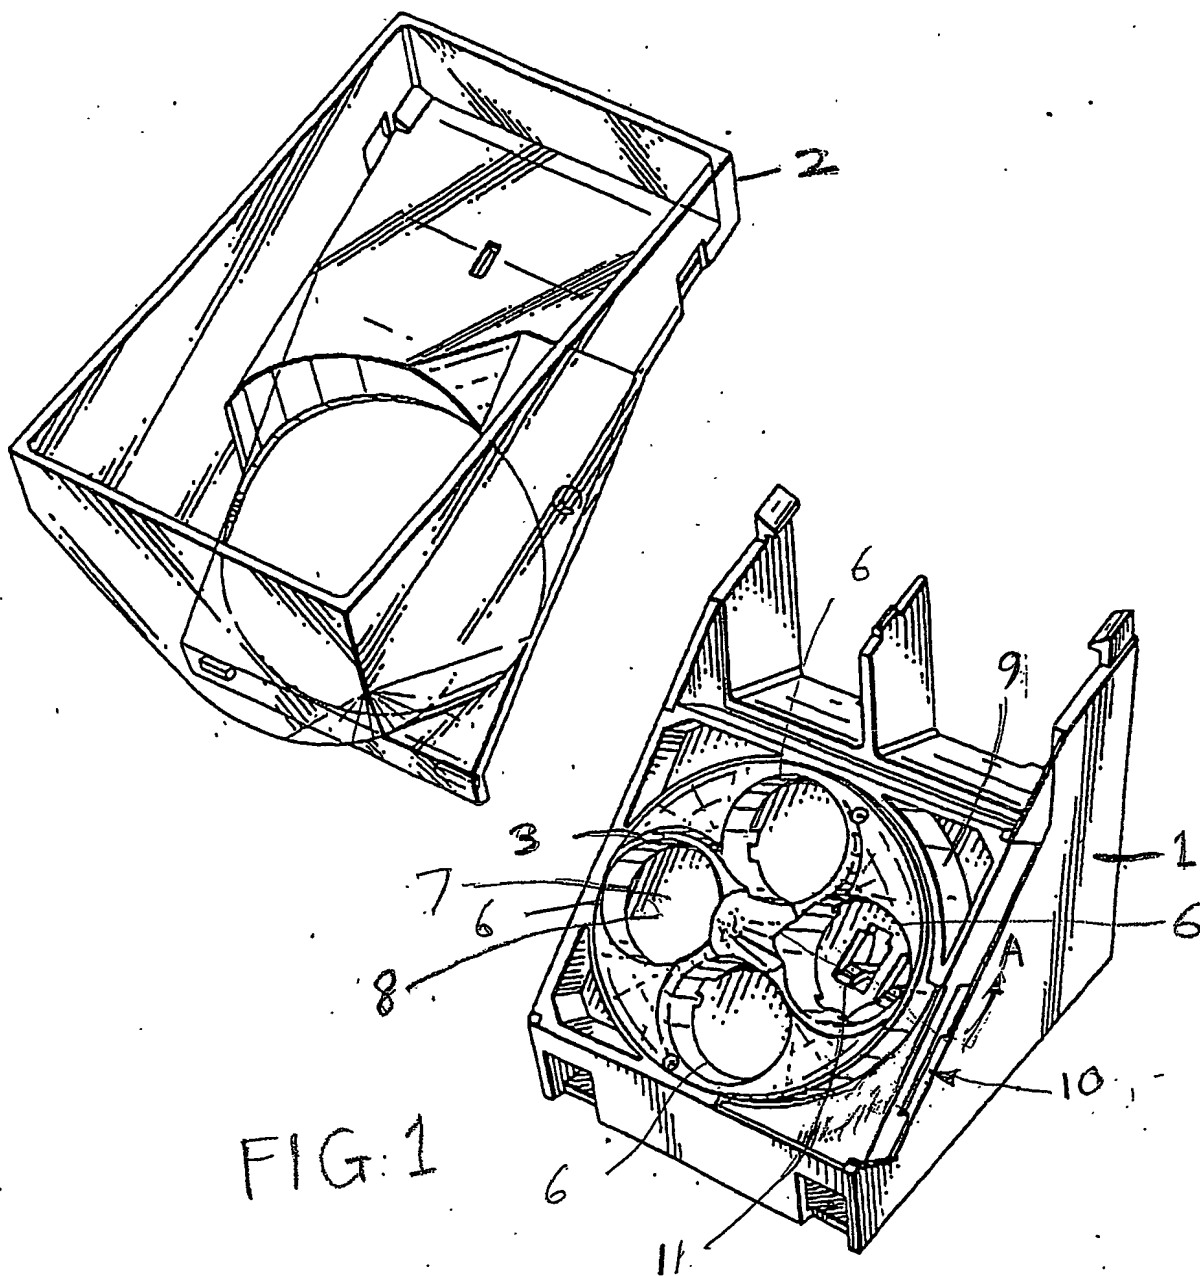


FIG. 1



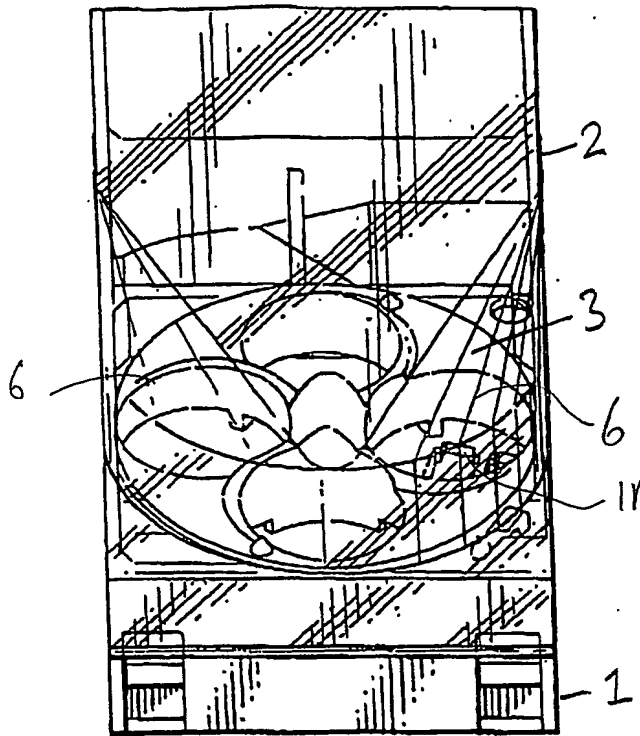


FIG. 2

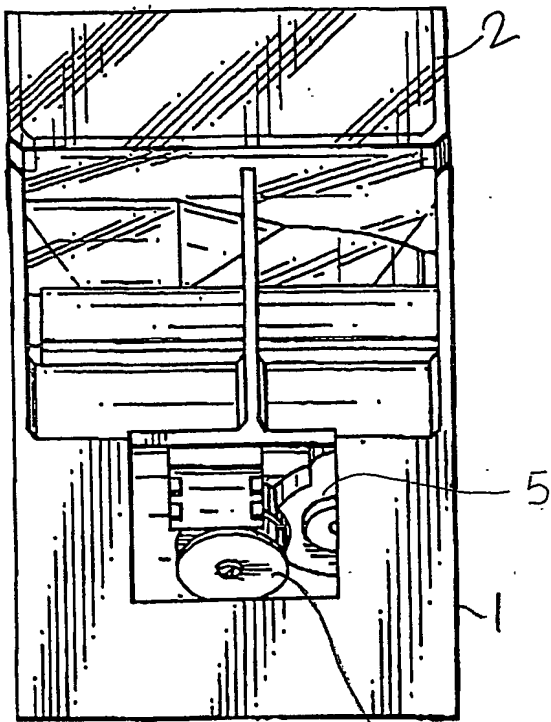
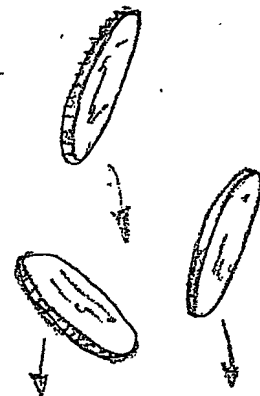


FIG. 3

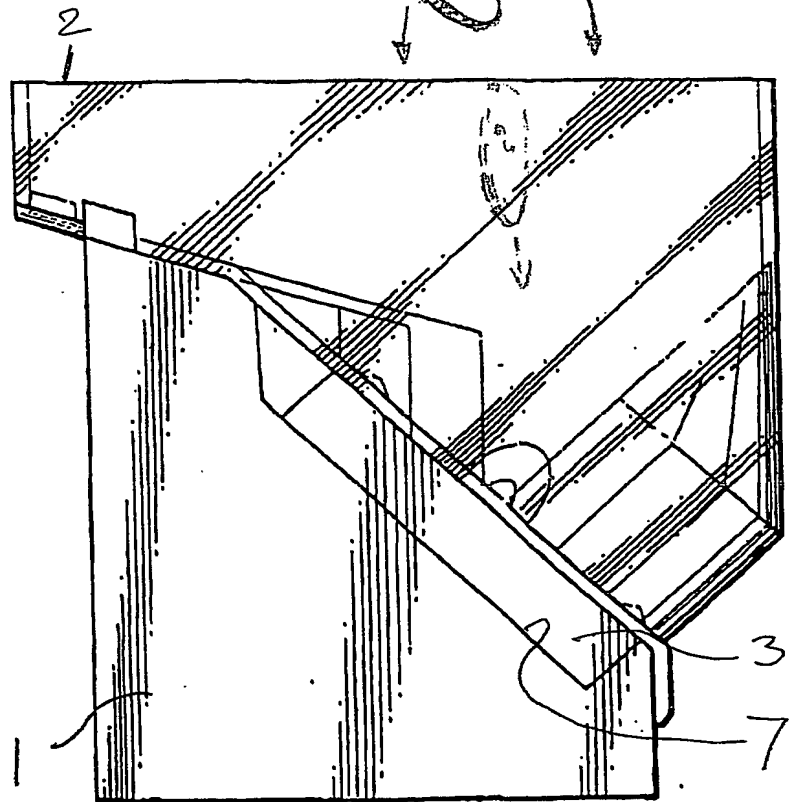
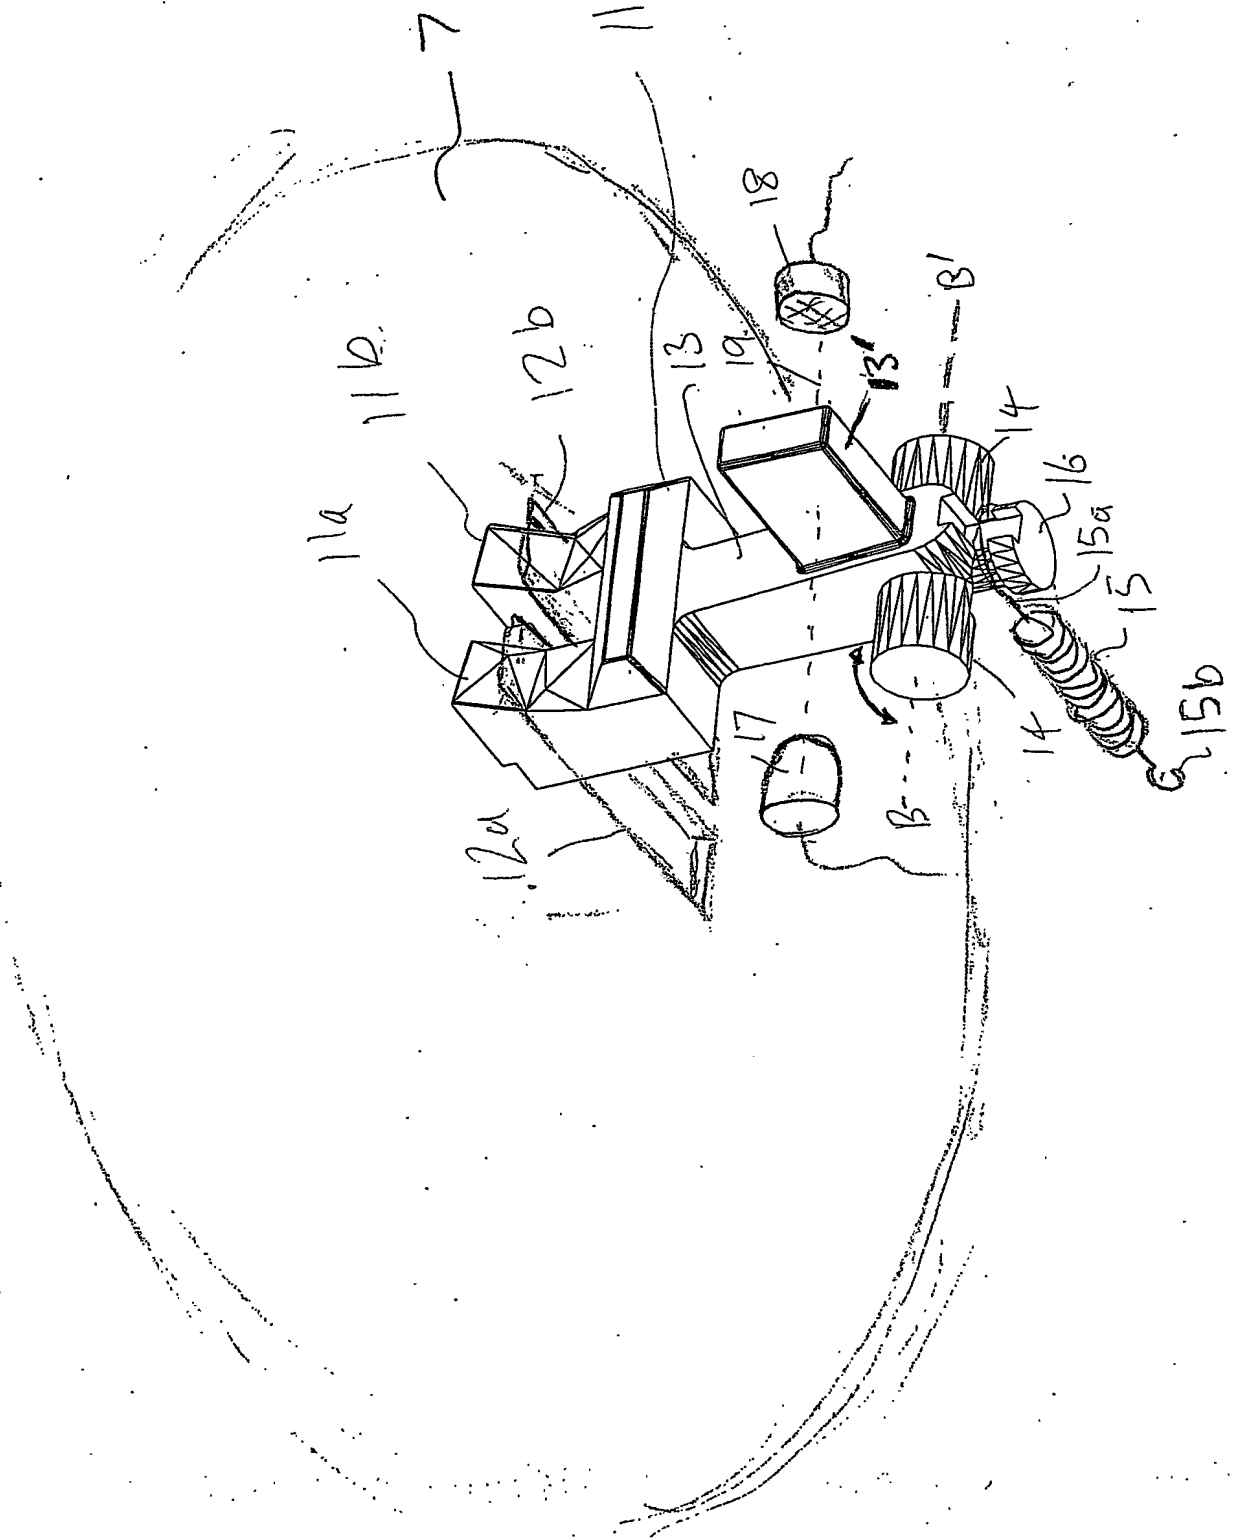


FIG. 4

FIG. 5



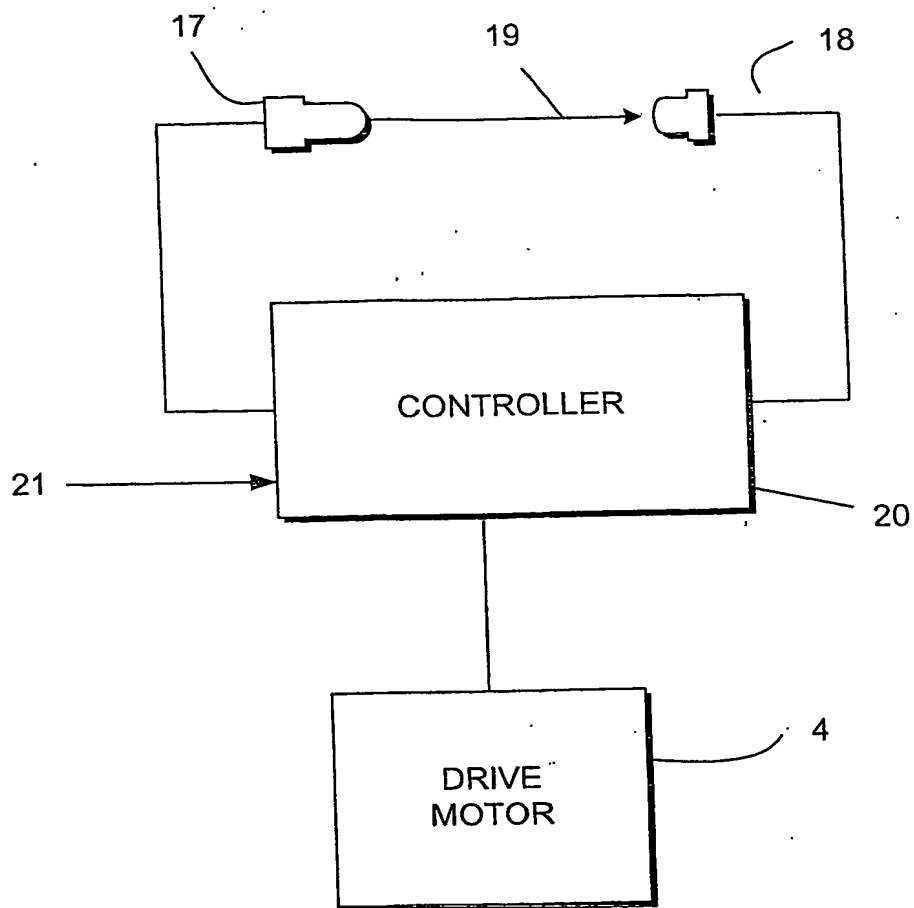


FIG. 6

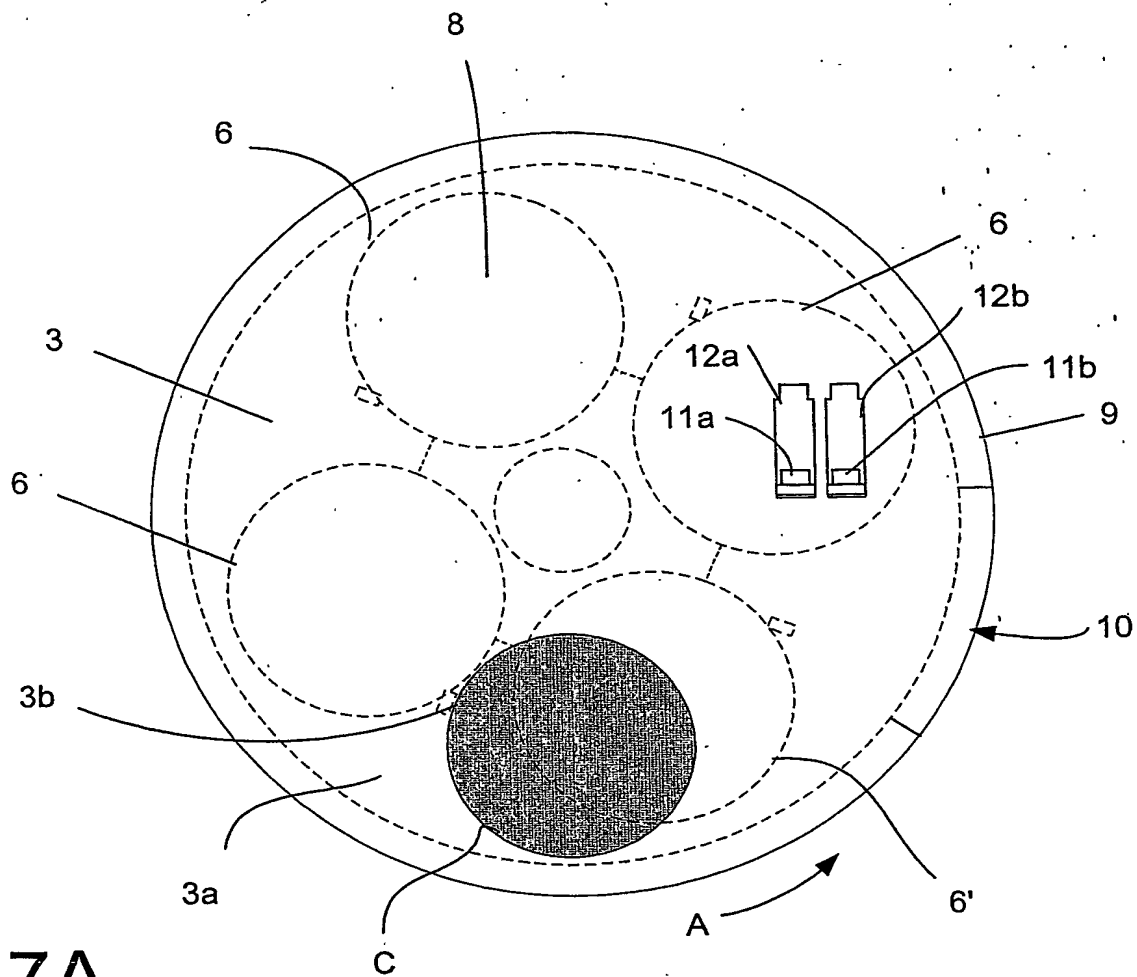


FIG. 7A

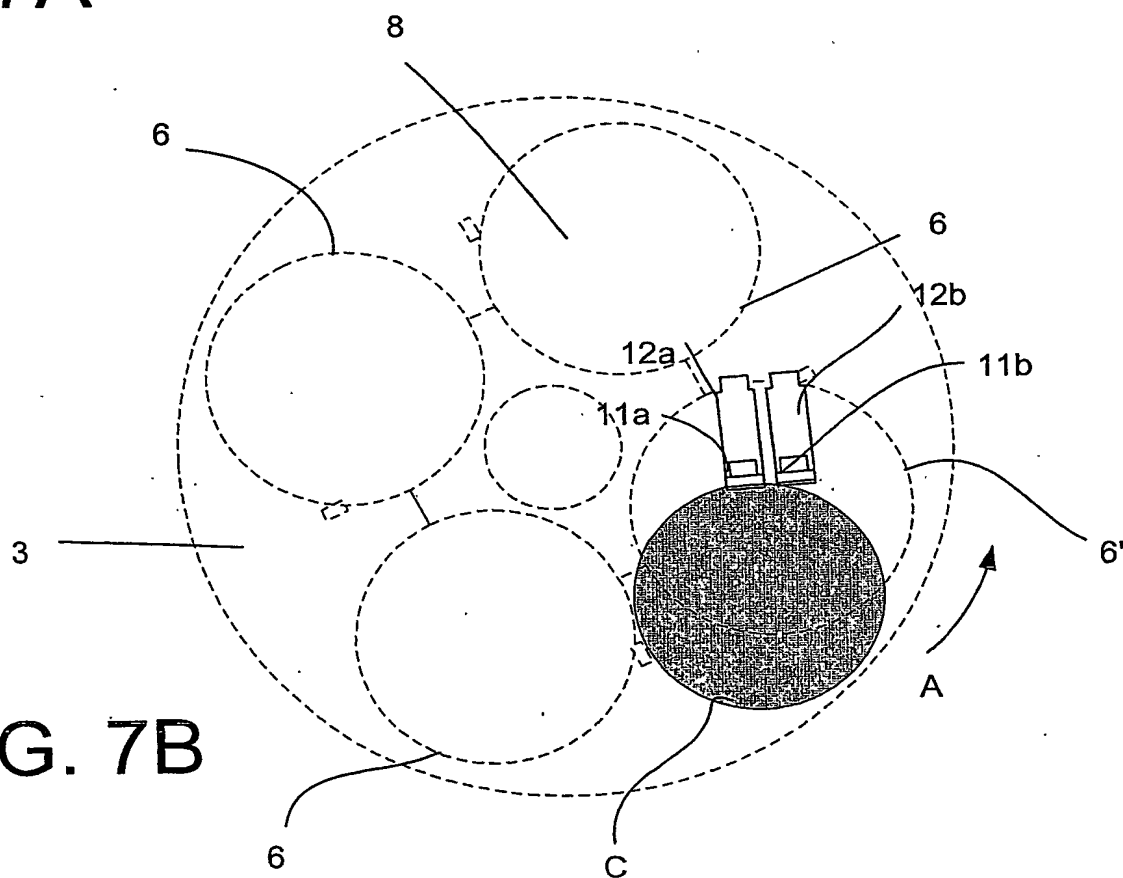


FIG. 7B

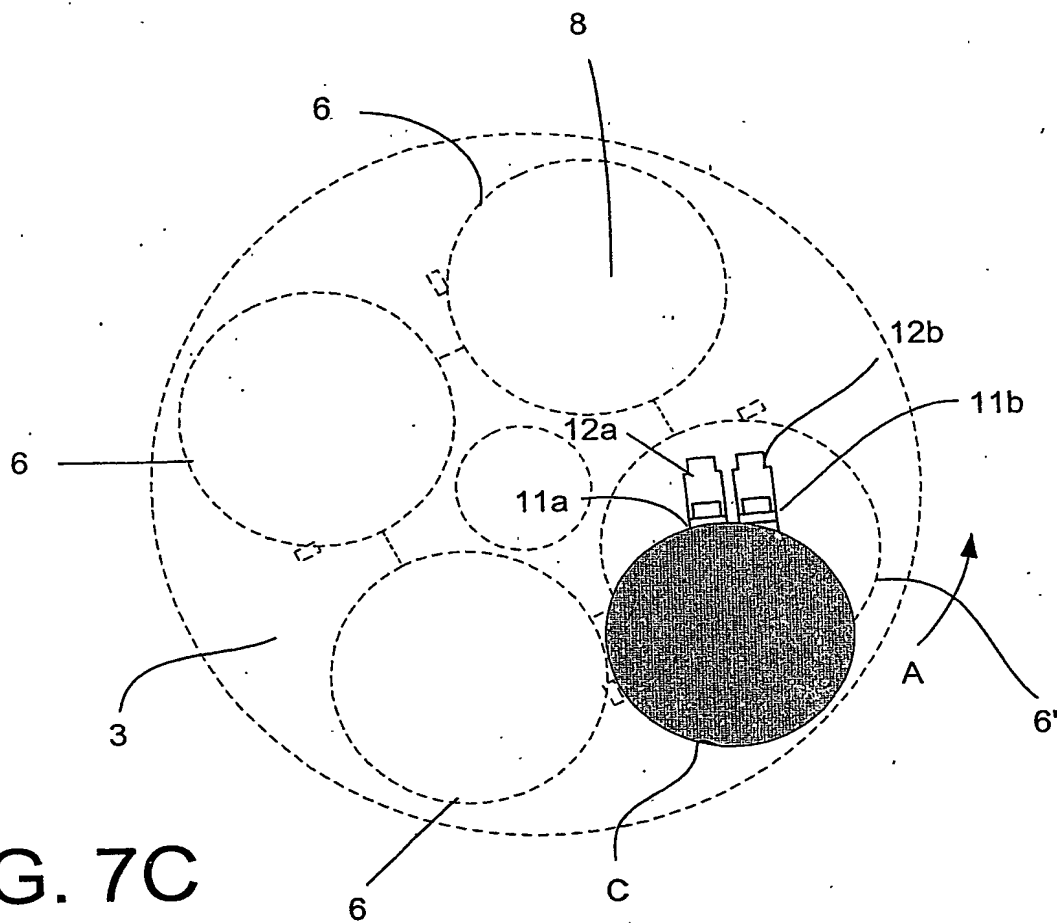


FIG. 7C

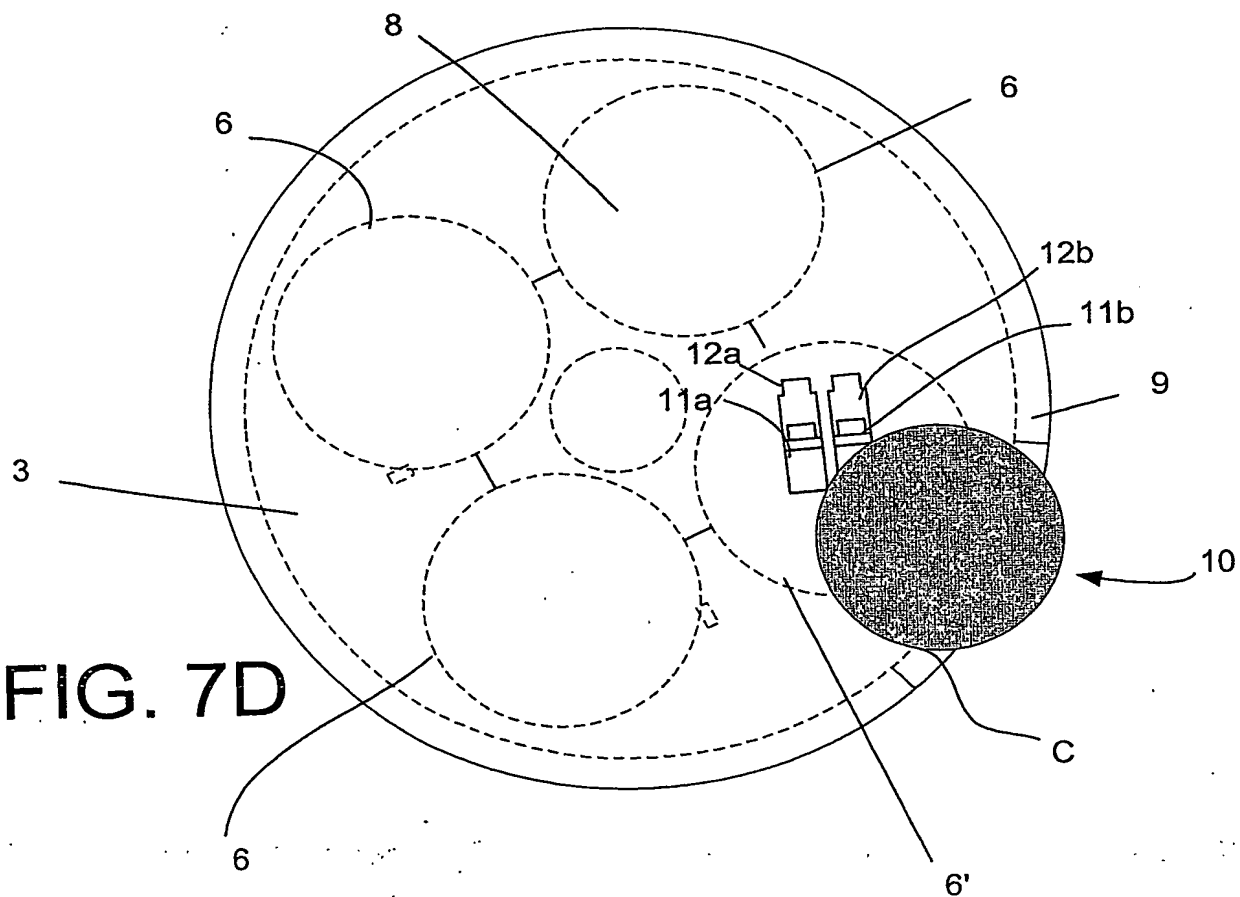


FIG. 7D

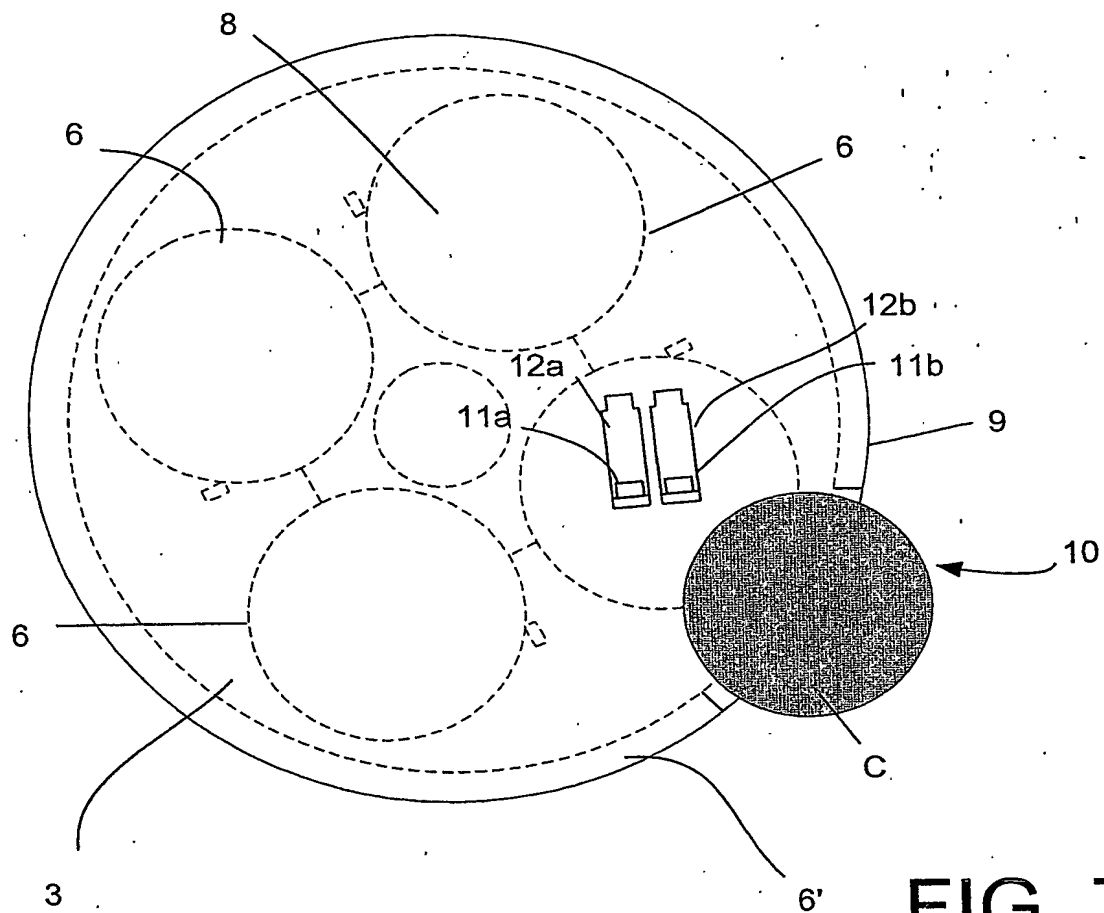


FIG. 7E

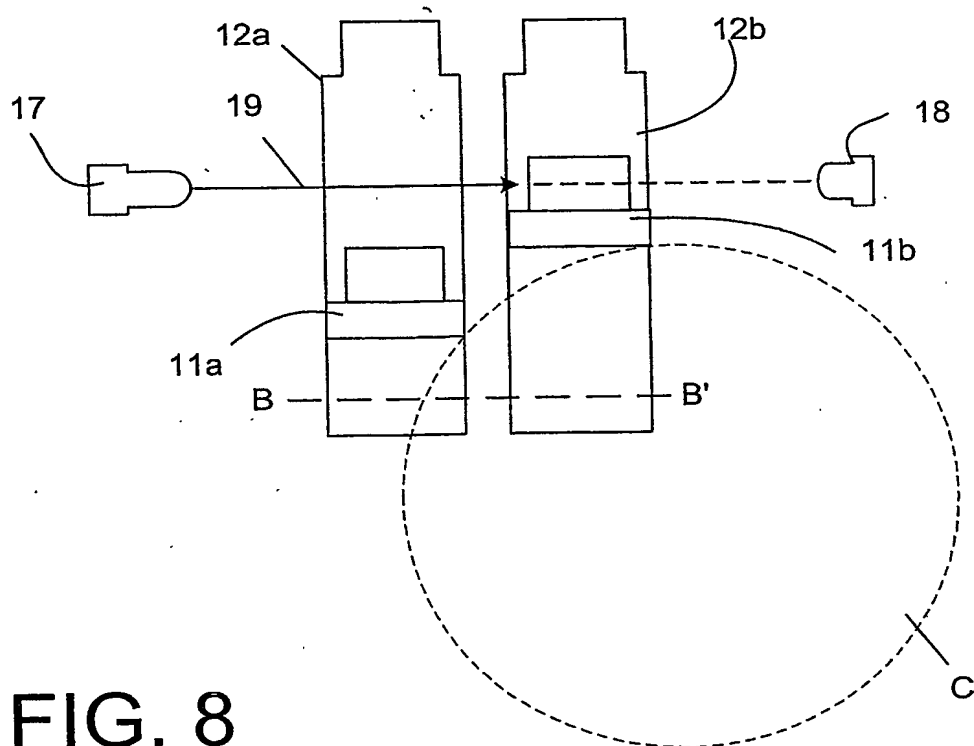
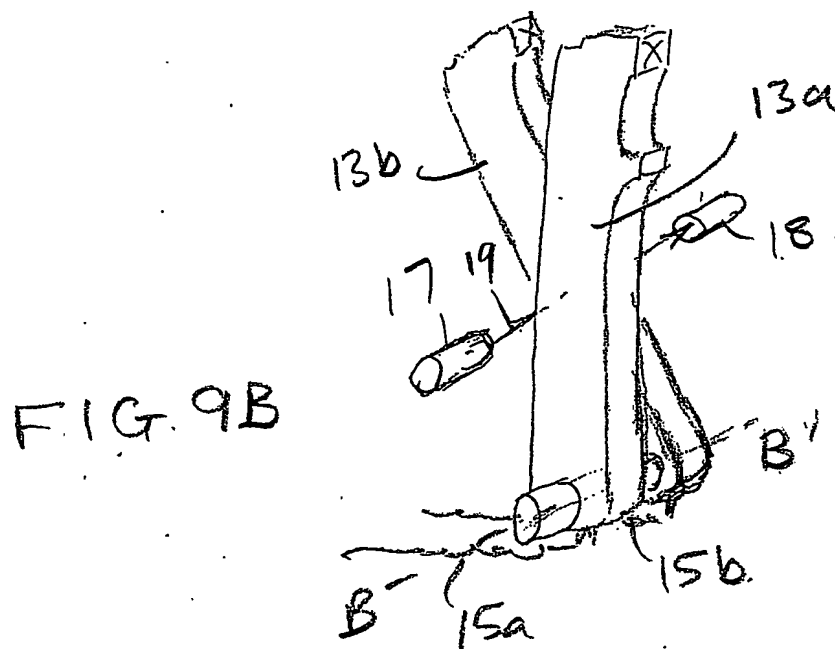
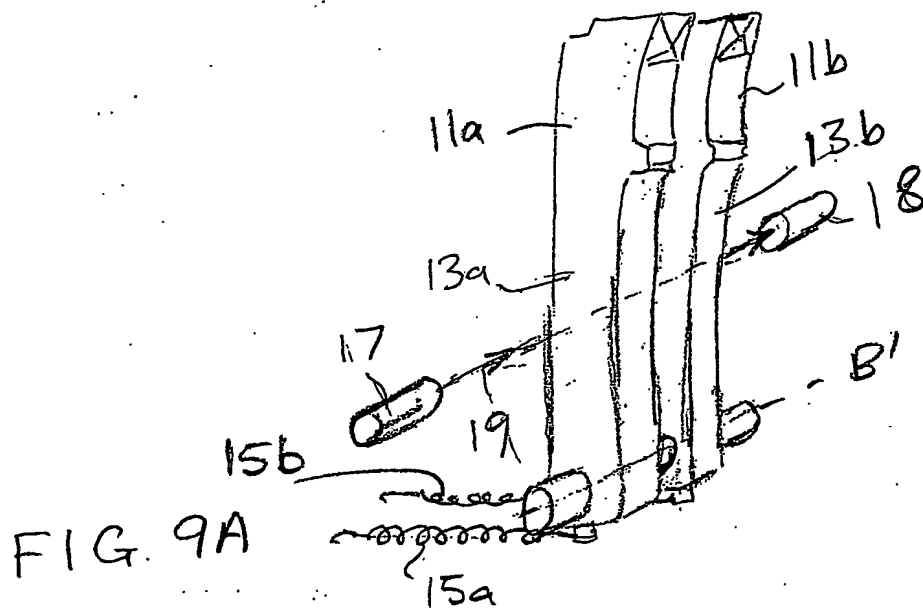


FIG. 8



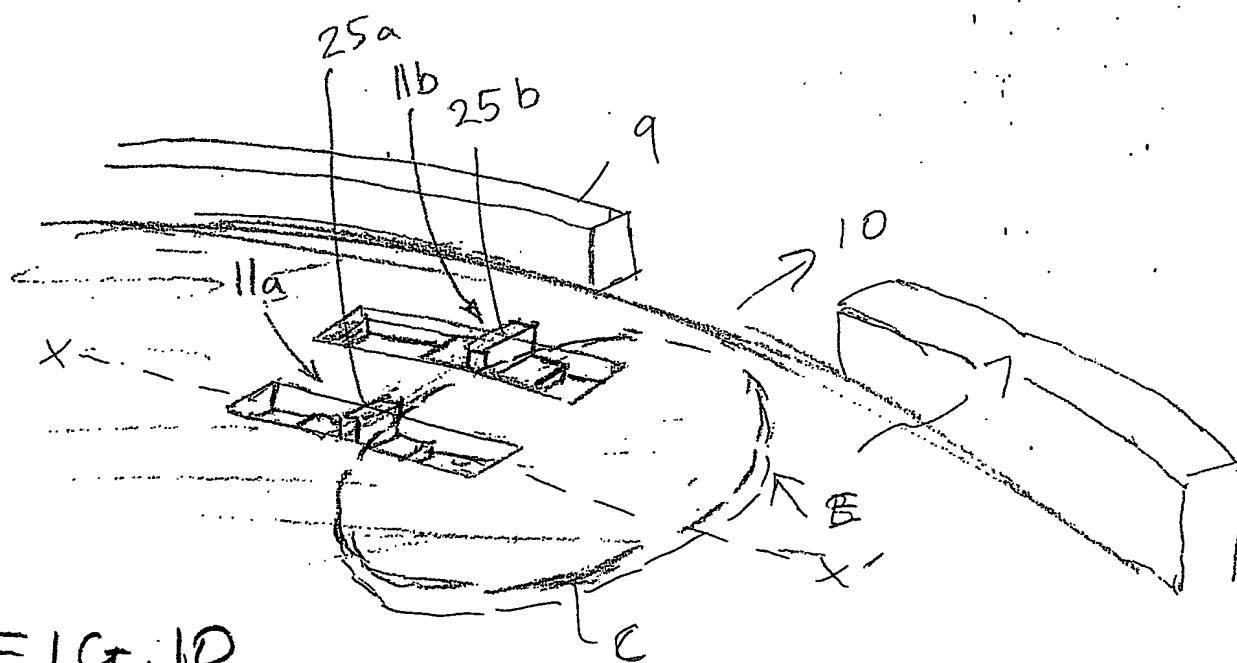


FIG. 10

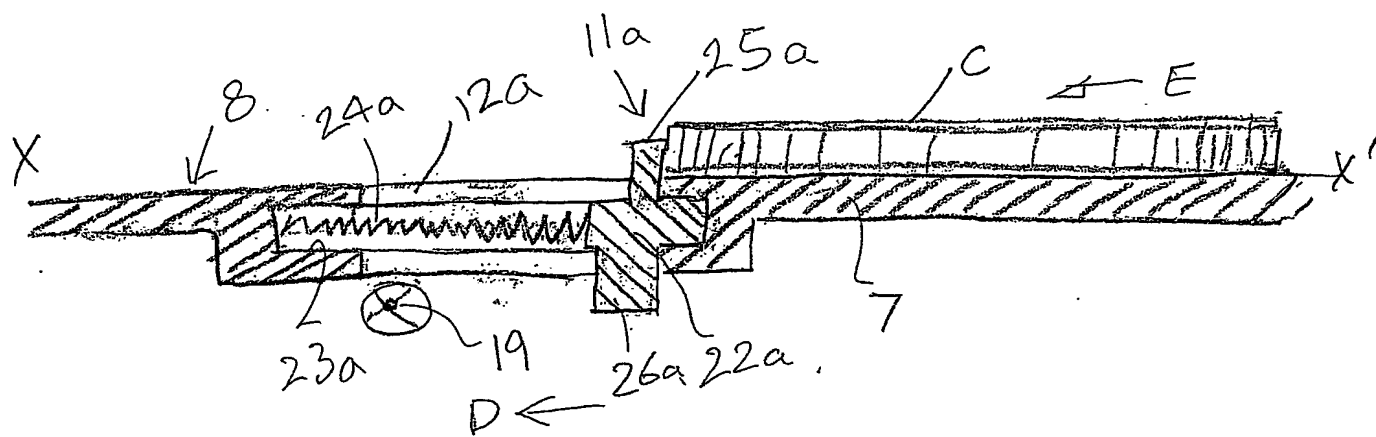


FIG. 11



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☒ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**